

Dimmer Switch (3 Gang)

Model No. LW430

Features

- RF Controllable Dimmer Switch
- Can be controlled by LightwaveRF Controllers
- Smartphone control (requires lightwave link)
- Standard wiring (no neutral required)
- Fits standard double 35mm back box
- Soft Start capability
- One touch restores previous light level
- 4 metallic finishes
- Compatible with dimmable LED lamps*
- Can perform multiway switching**

* Compatible with vast majority of dimmable LEDs see website for compatibility information

** Must work in combination with LightwaveRF 2-Way Dimmers to perform 2-Way Switching

Specification

RF frequency: 433.92 MHz

Input rating: 220-240V~ 50Hz.

Output rating: 3W-210W max (per gang).

Incandescent Load: 20W-210W max (per gang).

Back Box Depth: 35mm min.

Earthing: Not essential (double insulated)

Standby Energy Use: Less than 1W

Wiring: Neutral wire NOT required

Warranty: 2 year standard warranty

Environment: For indoor use only

Available Finishes

Stainless Steel


White Metal

Chrome

Black Chrome

Regulatory Standards

CE Marked.

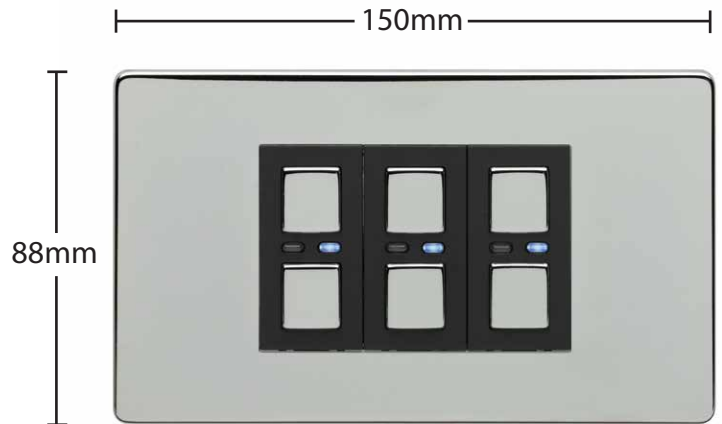

Switched live
(live out)

Live in



2-Way
Switching
Connection
(no mains)

