

## Dimmer Switch (4 Gang)

Model No. LW440

### Features

- RF Controllable Dimmer Switch
- Can be controlled by LightwaveRF Controllers
- Smartphone control (requires lightwave link)
- Standard wiring (no neutral required)
- Fits standard 35mm double back box
- Soft Start capability
- One touch restores previous light level
- 4 metallic finishes
- Compatible with dimmable LED lamps\*
- Can perform multiway switching\*\*

\* Compatible with vast majority of dimmable LEDs see website for compatibility information  
 \*\* Must work in combination with LightwaveRF 2-Way Dimmers to perform 2-Way Switching

### Specification

**RF frequency:** 433.92 MHz

**Input rating:** 220-240V- 50Hz.

**Output rating:** 3W-210W max (per gang).

**Incandescent Load:** 20W-210W max (per gang).

**Back Box Depth:** 35mm min.

**Earthing:** Not essential (double insulated)

**Standby Energy Use:** Less than 1W

**Wiring:** Neutral wire NOT required

**Warranty:** 2 year standard warranty


**Environment:** For indoor use only

### Available Finishes

- Stainless Steel
- White Metal
- Chrome
- Black Chrome


### Regulatory Standards

CE Marked.

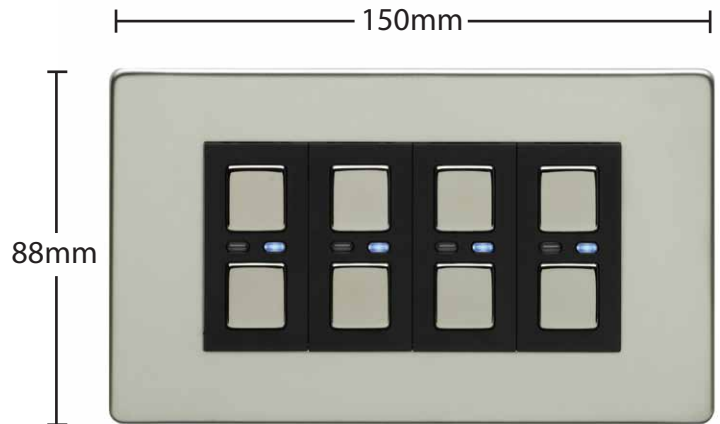

Switched live  
(live out)

Live in

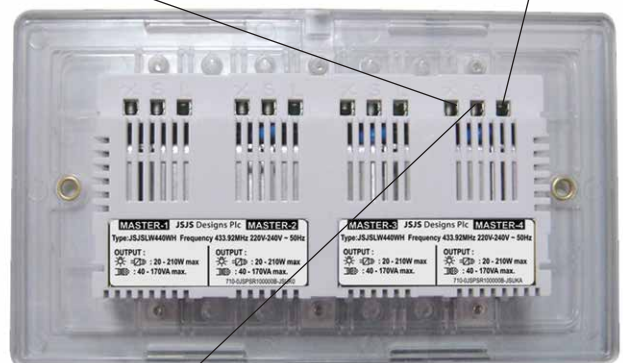

2-Way  
Switching  
Connection  
(no mains)

